



Electrolux

Digital Undercounter Benefit-Line Refrigerated Counter 2 Doors and 4 Drawers - AISI 304

ITEM #

MODEL #

NAME #

SIS #

AIA #



Electrolux

Benefit-Line Refrigerated Counter 2 Doors and 4 Drawers - AISI 304



Digital Undercounter

Benefit-Line Refrigerated Counter 2 Doors and 4 Drawers - AISI 304

726170 (RCSN4M24)

2-door and 4-drawer
refrigerated counter, -2/+10°C,
AISI 304

Short Form Specification

Item No.

Internal and external doors, front and side panels and removable worktop (50mm thick) in 304 AISI stainless steel. External back panel in galvanized steel. Reversible self-closing doors in positions less than 90°, a stop at 95° and maximum opening at 180° with a door seal guaranteeing a perfect closure. Height adjustable legs from -10/+60 in 304 AISI stainless steel. Insulation guaranteed by cyclopentane insulating foam (50mm thick). Digital control panel. Operating temperature -2/+10°C. Automatic defrosting and evaporation of defrosted water using a hot gas. Built-in refrigeration unit to operate in ambient temperatures up to +43°C. Ventilated. R404a gas in refrigeration circuit. CFC and HCFC free.

Supplied with n.2 Rilsan coated grids 1/1GN.

Main Features

- Suitable for use in ambient temperatures of up to 43 °C.
- Complies with main international certification bodies and CE marked.
- Digital control panel allowing the easy and precise setting and control of the internal temperature.
- Operating temperature can be adjusted from -2 to 10 °C to suit different food storage requirements.
- CFC and HCFC free.
- Kit 1/2 drawers available as accessory.
- The door self-closes when opened less than at a 90° angle and is equipped with a door seal to guarantee perfect closure.
- Completely automatic defrosting and automatic evaporation of defrost water by hot gas.
- Forced air cooling system guaranteeing great uniformity of the temperature in the counter and excellent conservation of the food quality.
- High standards of hygiene and ease of cleaning are guaranteed by the rounded internal corners of the cabinet and easily removable runners and grids.

Construction

- Refrigerant type: R404a.
- Legs in 304 AISI stainless steel (150 mm high, adjustable in height), with plastic interior.
- Insulation guaranteed by high density expanded cyclopentane 50 mm in thickness.
- Back panel in galvanized steel.
- Internal and external doors, front and side panels and 50mm thick removable worktop in 304 AISI stainless steel.

Included Accessories

- 2 of 1/1GN grey rilsan grid PNC 881435

Optional Accessories

- 2 half drawers kit for Benefit line counters PNC 880023 ☐
- Lock kit for Benefit line counters PNC 880024 ☐
- Wheels kit PNC 880025 ☐
- Reversibility door kit PNC 880046 ☐
- Internal structure to support 3 grids (right and left) PNC 880047 ☐
- Kit 2 stainless steel grids GN1/1 for refrigerated counters PNC 880139 ☐
- Stainless steel internal structure to support 6 grids (right and left) PNC 880140 ☐
- Kit 1 foot for Benefit counters, 4 compartments PNC 880192 ☐
- Kit for integrated HACCP advanced connection (Carel) for digital ecostore cabinets and counters (not for ecostore Touch models) PNC 880252 ☐
- 1/1GN plastic container h=65mm PNC 881038 ☐
- 1/1GN plastic container h=150mm PNC 881040 ☐
- Printer for HACCP basic version (for cabinets and counters with digital control) PNC 881457 ☐
- Kit HACCP EKIS PNC 922166 ☐


APPROVAL:




Electrolux

Digital Undercounter Benefit-Line Refrigerated Counter 2 Doors and 4 Drawers - AISI 304

Front

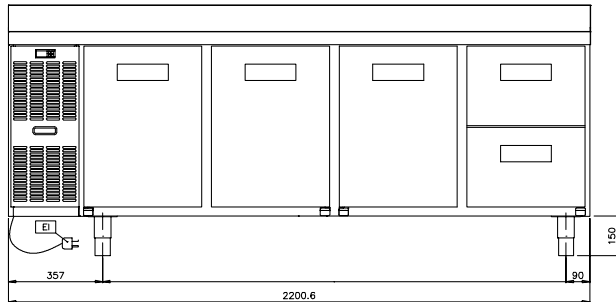


Top

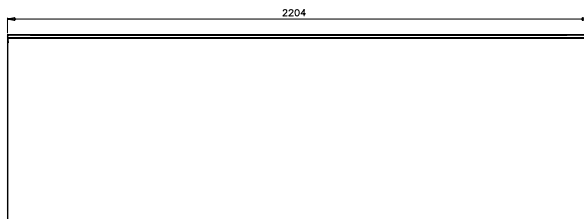

EI = Electrical connection

Side

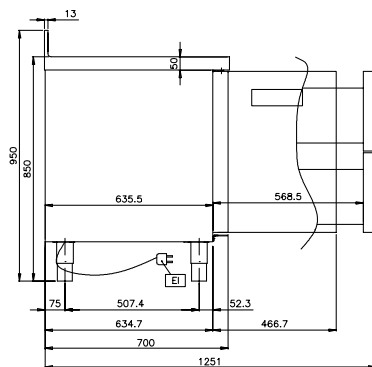

Electric

Supply voltage:

726170(RCSN4M24)

230 V/1N ph/50 Hz

Connected load:

0.267 kW

Key Information:

N° of doors:

2

Door hinges:

1 Left+1 Right

External dimensions, Height:

850 mm

External dimensions, Width:

2201 mm

External dimensions, Depth with
Doors Open:

1102 mm

Internal Dimensions (depth):

580 mm

Internal Dimensions (height):

543 mm

Internal Dimensions (width):

365 mm

Gross capacity:

560 lt

Net weight:

198 kg

Number and type of grids
(included):

2 - GN 1/1

Worktop type:

Stainless Steel

N° of drawers:

4

Built-in Compressor and Refrigeration Unit

Refrigeration Data

Control type:

Digital

Compressor power:

1/3 hp

Refrigerant type:

R404a

Refrigeration power:

448 W

Refrigerant weight:

210 g

Min/Max internal humidity:

57

Operating temperature min.:

-2 °C

Operating temperature max.:

10 °C

Operating mode:

Ventilated

N° defrost in 24 hrs:

every 6 hrs



Digital Undercounter
Benefit-Line Refrigerated Counter 2 Doors and 4 Drawers - AISI 304

The company reserves the right to make modifications to the products
without prior notice. All information correct at time of printing.

2012.09.03