



**Electrolux**

## Digital Undercounter Refrigerated Counter Saladette - 66 gal (250 lt) 2 Door

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



Electrolux



### Digital Undercounter

### Refrigerated Counter Saladette - 66 gal (250 lt) 2 Door

728628 (PTR259)

Refrigerated Counter  
Saladette - 66 gal (250 lt) 2  
Door - 230 V/1N/50Hz

### Short Form Specification

#### Item No. \_\_\_\_\_

Constructed entirely in 304 AISI stainless steel. Marble top. Can accomodate 5 GN 1/6 containers. High-density expanded polyurethane foam, 50 mm in thickness, with cyclopentane injection. Height-adjustable feet. Lower refrigerated compartment designed to accommodate GN 1/1 containers and equipped with N. 2 hinged doors. Built-in refrigeration unit. Ventilated. Refrigerant R134a. Digital control panel. Automatic evaporation of defrost water. Drain outlet. Suitable to operate in ambient temperatures up to +32° C. Temperature range: +2+10°C. CFC and HCFC free.

### Main Features

- Suitable for use in ambient temperatures of up to 32 °C.
- Adjustable temperature range from 2 °C to 10 °C to suit meat, fish and dairy storage requirements.
- Anti-tilt runners accept GN 1/1 containers.
- Digital control panel.
- Forced air circulation for rapid cooling and an even temperature distribution.
- CFC and HCFC free (ecological refrigerant type: R134a, - gas in foam: cyclopentane).
- 60 mm insulation for energy saving.
- Marble worktop suitable for 5 GN 1/6 containers.
- Drain outlet and automatic evaporation of defrost water.

### Construction

- Mounted on legs with height adjustment.
- Built-in compressor to suit operating conditions.
- Constructed from AISI 304 Stainless steel throughout to meet the highest hygiene standards.
- Rounded internal corners for ease of cleaning.
- Access to all components from the front.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.

### Optional Accessories

- 1/1GN plastic container h=100mm PNC 811451 ☐
- 1/1GN plastic container h=65mm PNC 881038 ☐
- 1/1GN plastic container h=150mm PNC 881040 ☐
- 1/1GN grey rilsan grid PNC 881435 ☐


APPROVAL: \_\_\_\_\_




Electrolux

## Digital Undercounter Refrigerated Counter Saladette - 66 gal (250 lt) 2 Door

Front

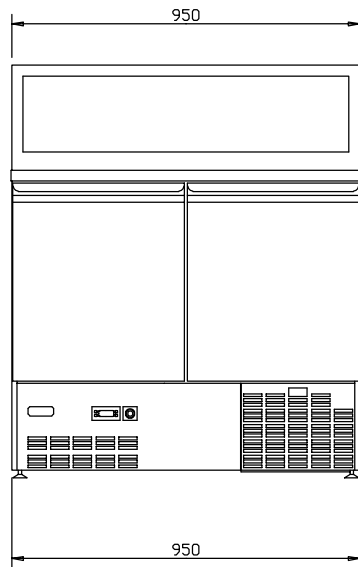


Top

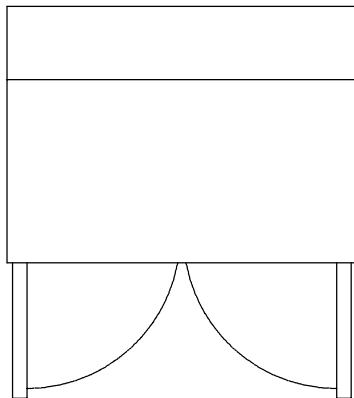

EI = Electrical connection

Side

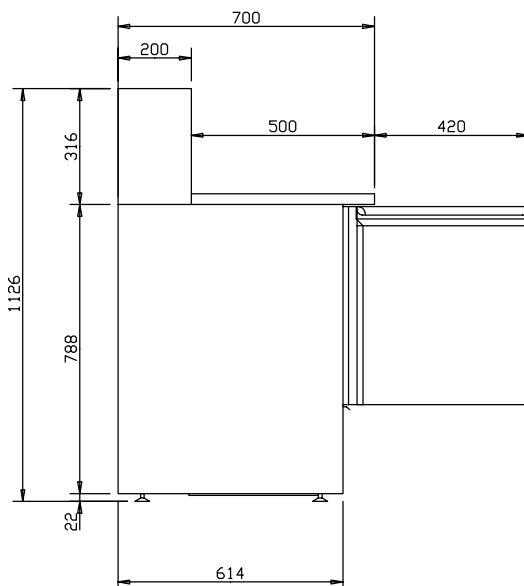

### Electric

Supply voltage:

728628(PTR259)

230 V/1N ph/50 Hz

### Key Information:

Door hinges: 1 Left+1 Right

Built-in Compressor and Refrigeration Unit

External dimensions, Height: 1126 mm

External dimensions, Width: 950 mm

External dimensions, Depth: 700 mm

External dimensions, Weight: 99 kg

Number and type of doors: 2

Depth with doors open: 1120 mm

Height adjustment: 0/0 mm

Number and type of grids (included): None - GN 1/1

### Refrigeration Data

Compressor power: 1/4; hp

Refrigerant type: R134a

Refrigeration power: 224 W

Refrigerant weight: 120 g



Digital Undercounter  
Refrigerated Counter Saladette - 66 gal (250 lt) 2 Door

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2009.10.24