



Electrolux

Digital Cabinets Refrigerated Counter 160 lt - undercounter glass door

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



Electrolux



Digital Cabinets

Refrigerated Counter 160 lt - undercounter glass door

727047 (RUCR16W1V)	Undercounter Refrigerator 160 lt - 1 glass door / white prepainted - 230 V/1N/50Hz
727031 (RUCR16G1V)	Undercounter Refrigerator 160 lt - 1 glass door / grey prepainted - 230 V/1N/50Hz

Short Form Specification

Item No. _____

The Electrolux range of 160 liter refrigerated counters offers customers a reliable, compact and easy to use cold storage. All the internal finishings are in commercial grade High Impact Polystyrene and all models require only 1 phase 220/240 V supply, allowing to be plugged directly into an existing power socket. Models are designed to operate at an ambient temperature of up to 32°C. The models detailed in this sheet are 160 liter undercounter refrigerators with white or grey painted door.

Main Features

- Internal light and lockable door.
- R134a gas in refrigeration circuit.
- Suitable for use in ambient temperatures of up to 32 °C.
- Refrigerators models have operating temperatures that can be adjusted from +2 to +10 °C to suit both meat and dairy storage requirements.
- Very quiet operation: noise level less than 45 dB (A).
- Automatic defrost and automatic evaporation of defrost water.
- Shelf runners are thermoformed and are incorporated in the internal structure to be easily cleanable.
- Compact cooling unit easily accesible from the rear of the appliance.
- Model requires only 1 phase 220/240V supply and can be plugged straight into an existing power socket.

Construction

- Interior cell is completely in white High Impact Polystyrene and has no joints to eliminate dirt traps.
- CFC and HCFC-free insulation.
- Refrigerant type: R134a.
- IP23 protection index.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Built-in compressor.
- The rounded internal corners, the easily removable grids allow for ease of cleaning and high hygiene standards.
- 30 mm thick insulation with cyclopentane injection for long-term insulation and energy saving.
- Reversible door.

Optional Accessories

- Rear wheel kit for 160lt for freestanding refrigerator and freezer PNC 880143 ☐
- Stacking kit for 160lt undercounter white painted refrigerator (only for 727047) PNC 880148 ☐
- Wall hanging kit for 160lt undercounter refrigerator PNC 880149 ☐
- Set of 3 grids for 160lt undercounter refrigerator with glass door, painted white (only for 727047) PNC 880150 ☐
- Bottle holder for 3 bottles, 160lt PNC 880159 ☐


APPROVAL: _____




Electrolux

Digital Cabinets Refrigerated Counter 160 lt - undercounter glass door

Front

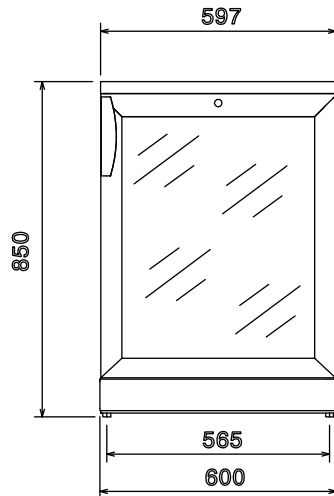


Top

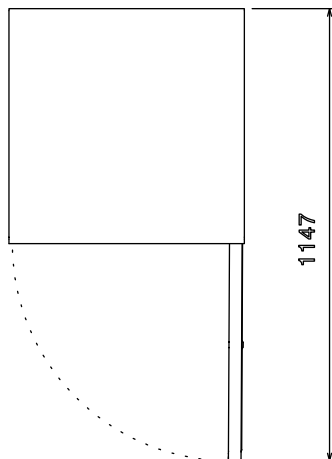

EI = Electrical connection

Side

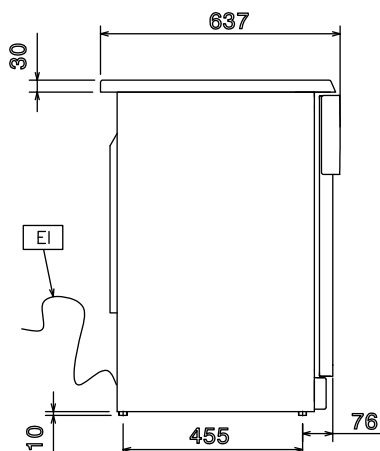

Electric

Supply voltage:

727047(RUCR16W1V)

230 V/1 ph/50 Hz

727031(RUCR16G1V)

230 V/1 ph/50 Hz

Connected load:

0.14 kW

Key Information:

Door hinges: Right Side

External dimensions, Height: 850 mm

External dimensions, Width: 600 mm

External dimensions, Depth with Doors Open: 0 mm

Number and type of doors: 1 Glass

Gross capacity: 165 lt

Noise level: 45 dBA

Height adjustment: 0/10 mm

Number and type of grids (included): 3 -

Built-in Compressor and Refrigeration Unit

Refrigeration Data

Control type: Mechanical

Refrigerant type: R134a

Refrigeration power: 153 W

Refrigeration power at evaporation temperature: -12 °C

Refrigerant weight: 65 g

Operating temperature min.: 2 °C

Operating temperature max.: 10 °C

External side panels:

727047(RUCR16W1V)

Prepainted white

727031(RUCR16G1V)

Prepainted Steel

External top panels:

727047(RUCR16W1V)

White ABS

727031(RUCR16G1V)

Grey ABS

External door material:

Glass

Internal panels material:

High Impact White Polystyrene

Operating mode:

Ventilated



Digital Cabinets
Refrigerated Counter 160 lt - undercounter glass door

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2012.09.28